
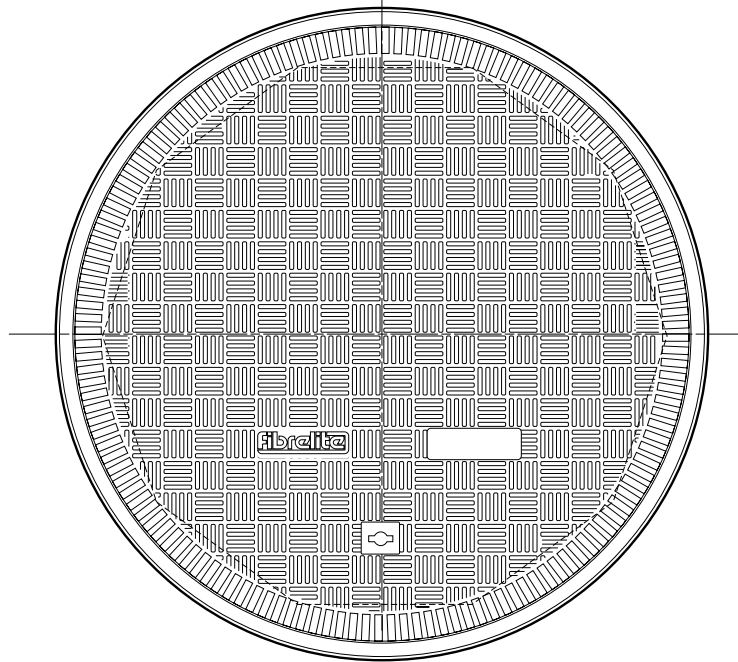
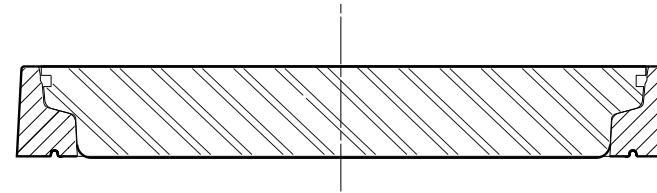


600mm (24") dia. flat sealed cover with composite frame. Temperature & chemical resistant. (Exceeds H25 Load Rating)

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE 
PART OF OPW A  COMPANY

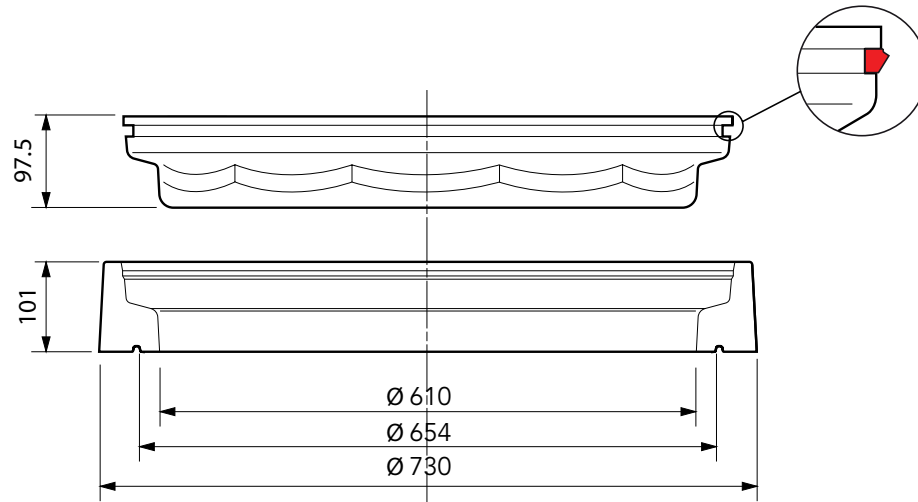

Load Rating	Cover Weight	Frame Weight
C250	21 kg	9 kg

600mm (24") dia. flat sealed cover with composite frame. Temperature & chemical resistant. (Exceeds H25 Load Rating)

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE 
PART OF OPW A DOVER COMPANY


CONCRETE

VERY IMPORTANT


OUTER EDGE "A" OF FRAME SET 5MM ABOVE GENERAL FORECOURT AREA WITH CONCRETE RAMPED AWAY OVER 300MM

VERY IMPORTANT


The underside of the frame must be adequately supported by concrete.

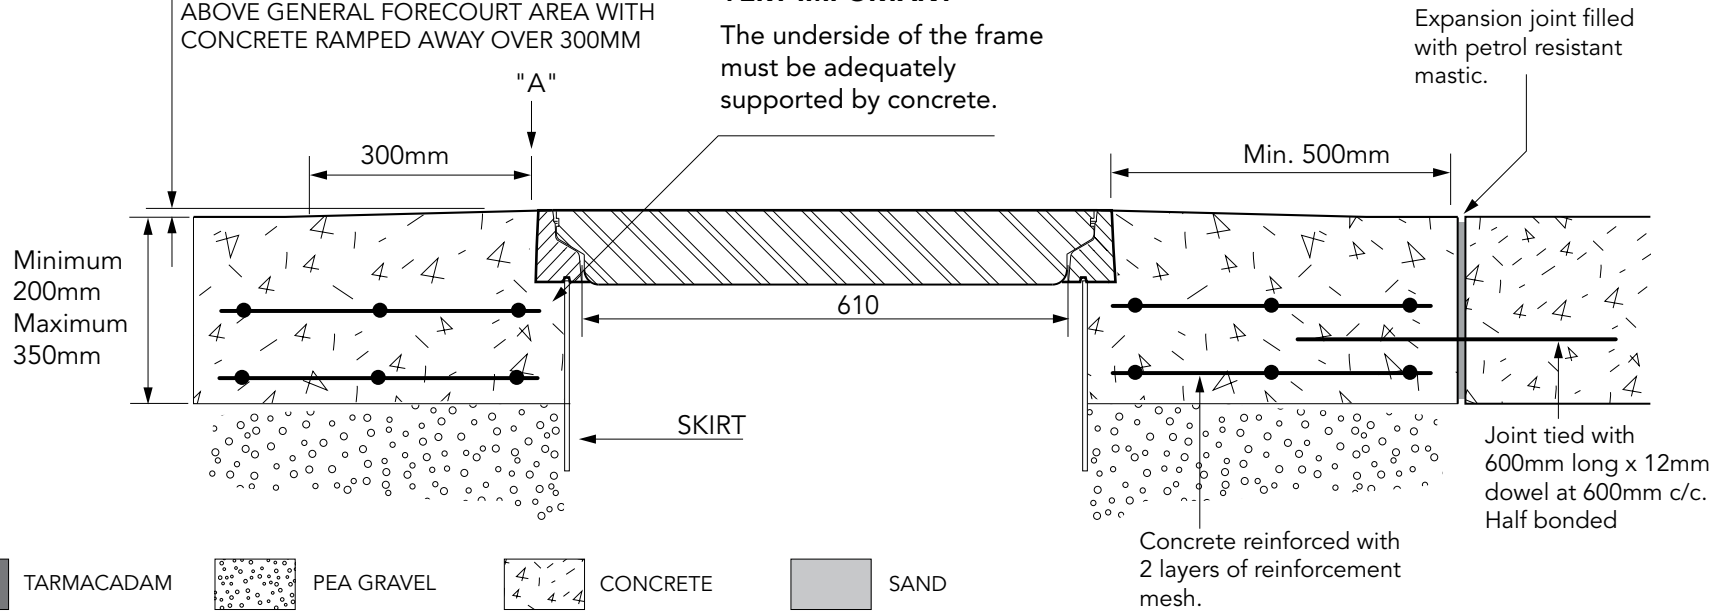

TARMACADAM

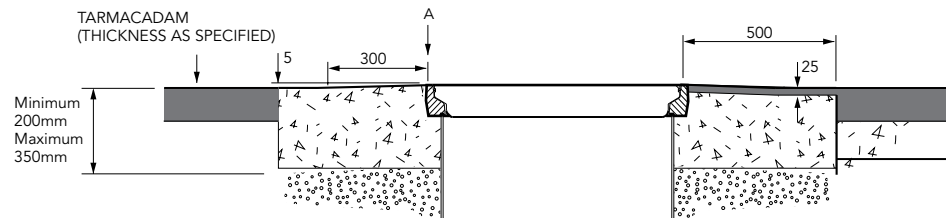

SETTS

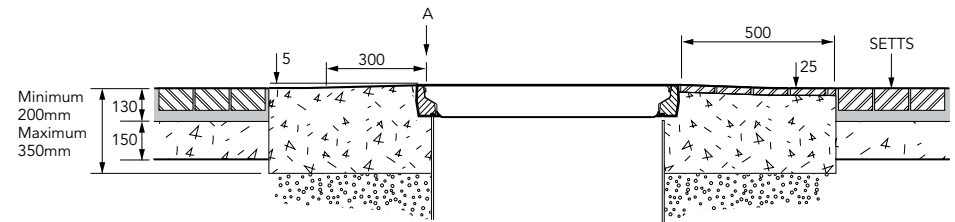

600mm (24") dia. flat sealed cover with composite frame. Temperature & chemical resistant. (Exceeds H25 Load Rating)

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE 
PART OF OPW A DOVER COMPANY