

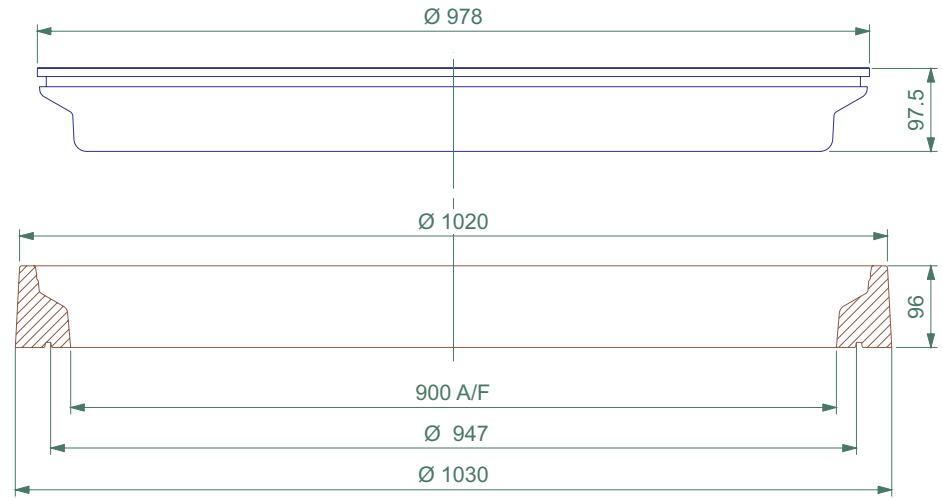


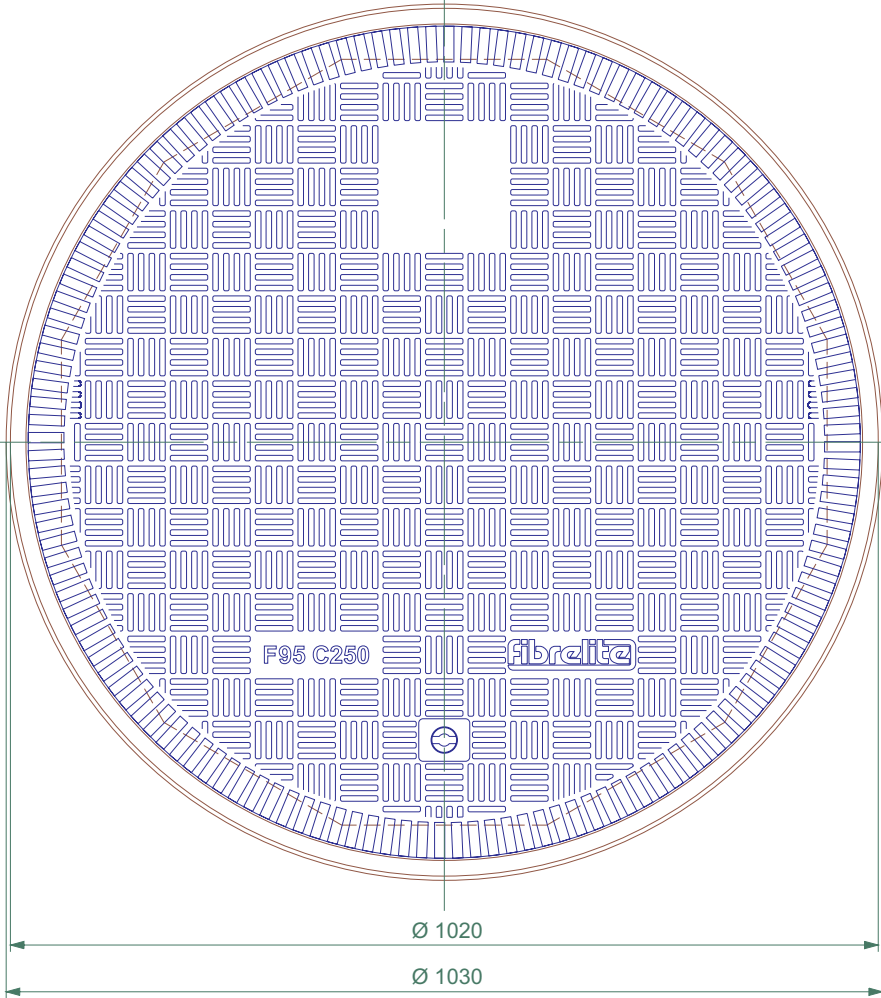

900mm diameter watertight flat sealed cover steam with composite frame. Temperature & chemical resistant. Designed for steam applications

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE 
PART OF OPW A  DOVER COMPANY

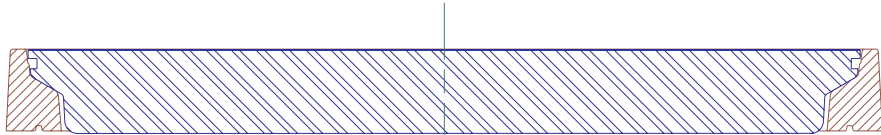

Load Rating	Cover Weight	Frame Weight
B125	21 kg	9 kg
C250	34 kg	9 kg
D400	47 kg	9 kg

900mm diameter watertight flat sealed cover steam with composite frame. Temperature & chemical resistant. Designed for steam applications

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



CONCRETE


VERY IMPORTANT

OUTER EDGE 'A' OF FRAME SET 5MM ABOVE GENERAL FORECOURT AREA WITH CONCRETE RAMPED AWAY OVER 300MM


VERY IMPORTANT

The underside of the frame must be adequately supported by concrete.


Expansion joint filled with petrol resistant mastic.

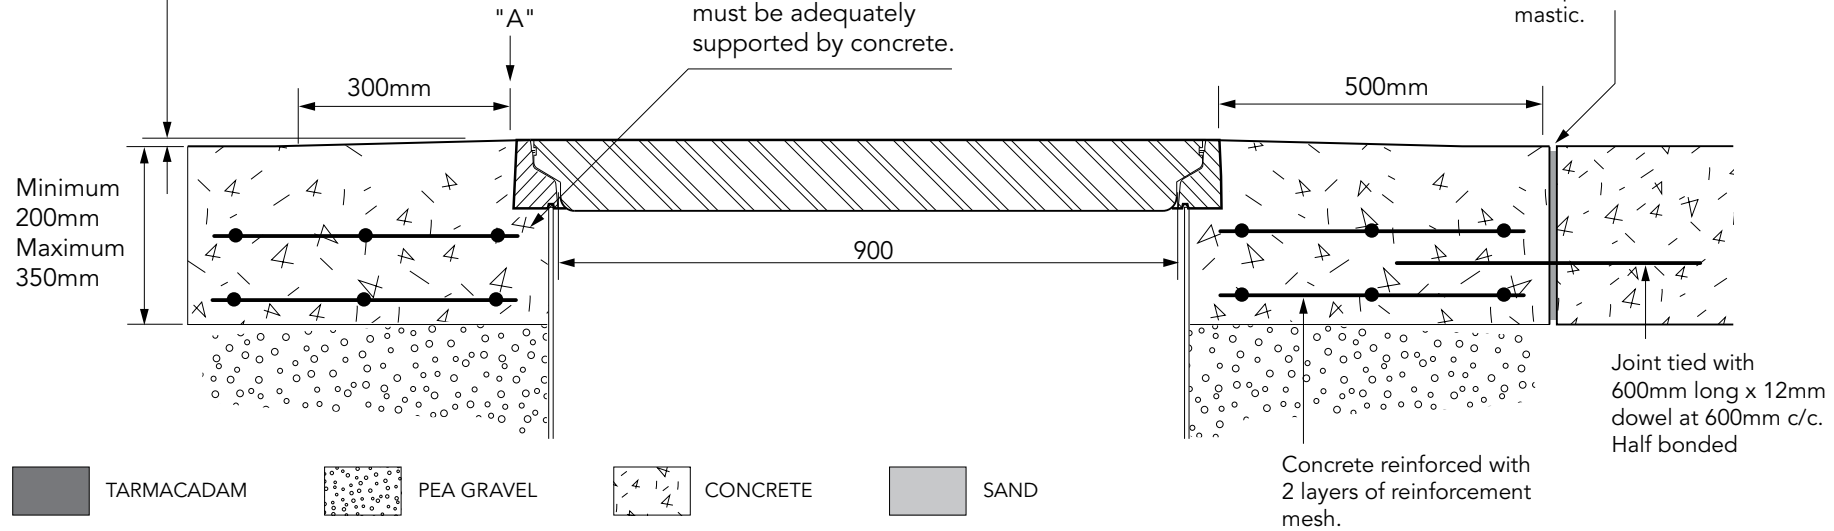

TARMACADAM

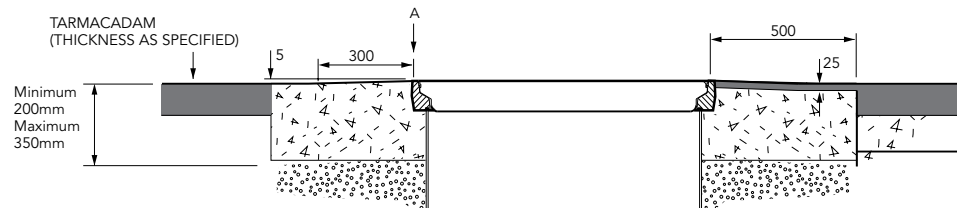

SETTS

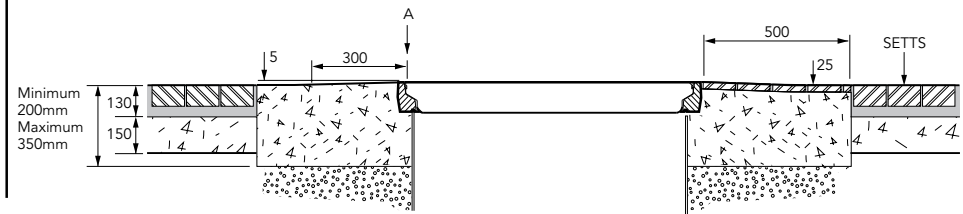

900mm diameter watertight flat sealed cover steam with composite frame. Temperature & chemical resistant. Designed for steam applications

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE 
PART OF OPW A DOWER COMPANY